

Westlock control and monitoring equipment can be fitted with a variety of switches and sensors to provide the optimum combination and ideal solution for each application. Please contact your local sales office for further advice.

**Magnum XT-90 hermetically sealed proximity switch**




Hermetically-sealed proximity switches with either pure tungsten or rhodium contacts for use with low power I/O's to provide longer contact life.

**Technical Data**

Contact arrangement	SPDT, Form C (normally open)
Contacts	Pure tungsten Rhodium
Operating time	3.0 ms
Initial contact resistance	0.50 ohms (max.) tungsten 0.10 ohms (max.) rhodium
Seal	Hermetic
Housing (flame retardant)	High impact PBT
Approvals	UL
Temperature range	-40°F to +185°F [-40°C to +85°C]
Operational life	600,000 cycles (full rated load)
Repeatability	0.125 mm

**Electrical Rating**

Rhodium	SPDT Form C (normally open) 0.2 A/120 V AC, 1 A/24 V DC
Tungsten	SPDT Form C (normally open) 3 A/120 V AC, 1.5 A/240 V AC, 2 A/24 V DC

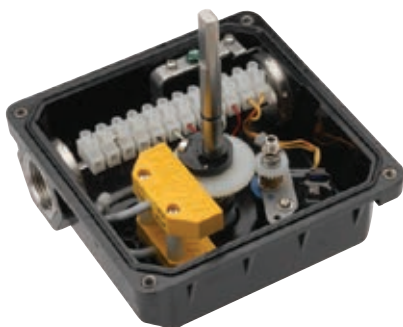

**MagPAC modular sensors**



Modular sensors with bifurcated reed switches designed specifically for use in low power and high DI card capacitance discrete position feedback applications.

**Technical Data**

Contact arrangement	Two SPST, Form A (normally open)
Contact material	Movable contact - Silver cadmium oxide Stationary contact - Molybdenum
Operating time	≤ 4 ms
Releasing time	≤ 2 ms
Initial contact resistance	≤ 250 milliohms
Seal	Hermetic
Approvals	CSA, FM
Operating temperature	-40°F to +185°F [-40°C to +85°C]
Operational life	100,000,000 operations (no load)
Repeatability	0.005 [0.125 mm]
Warranty	5 years

**Electrical rating**

Rated voltage	12 - 120 V AC/V DC
Rated current	Min. - 2 mA to light LED, Max. - 750 mA
Allowable solenoid input voltage	25 - 120 V AC/V DC

**P+F NJ2-V3-N inductive proximity sensor**

Intrinsically safe



A solid state inductive proximity sensor which is available in NAMUR output. It is ideal for use in devices within potentially explosive atmospheres.

**Technical Data**

Sensing range	2 mm
Electrical version	DC voltage 2 wire in accordance with EN 60947-5-6 (NAMUR)
Hysteresis	3-15% (5% typical)
Switching frequency	1 kHz
Input voltage range	5- 25 V DC
Output/current consumption	Cam trigger present ≤ 1 mA Cam trigger absent ≥ 3 mA (15 mA max)
Operating temperature	+14°F to +212°F [-10°C to +100°C]



### SPDT mechanical switch V3



A V3 SPDT (single pole double throw) mechanical switch (Form C).

Technical Data	
Operating force	150 gram max.
Release force	15 gram min.
Differential travel	0.05 - 0.25 mm
Overtravel	0.039 inch [1 mm]
Electrical rating	
Contact Arrangement	SPDT, Form C (normally open) 15 A/125/250 V AC 6 A/24 V DC 0.5 A/125 V DC 0.25 A/250 V DC

### DPDT mechanical switch (Licon)



A Form CC DPDT (double pole double throw) mechanical switch with silver plated contacts.

Technical Data	
Contacts	Silver plated
Approvals	UL, CSA
Electrical rating	
Contact Arrangement	DPDT (Form CC) 10 A/125/250 V AC 10 A/28 V DC

#### US/Canada: Saddle Brook, NJ

Ph: +1 201 794 7650

Fax: +1 201 794 0913

E-mail: [westlockinfo@westlockcontrols.com](mailto:westlockinfo@westlockcontrols.com)

#### South America: Sao Paulo, Brazil

Ph: +55 11 2588 1400

Fax: +55 11 2588 1410

E-mail: [comercial@westlock.com.br](mailto:comercial@westlock.com.br)

#### Europe: Kent, England

Ph: +44 1892 516277

Fax: +44 1892 707620

E-mail: [sales@westlockuk.com](mailto:sales@westlockuk.com)

#### Asia: Singapore

Ph: +65 6768 5850

E-mail: [sales@westlockuk.com](mailto:sales@westlockuk.com)